




GEOMETRY GLOSSARY /

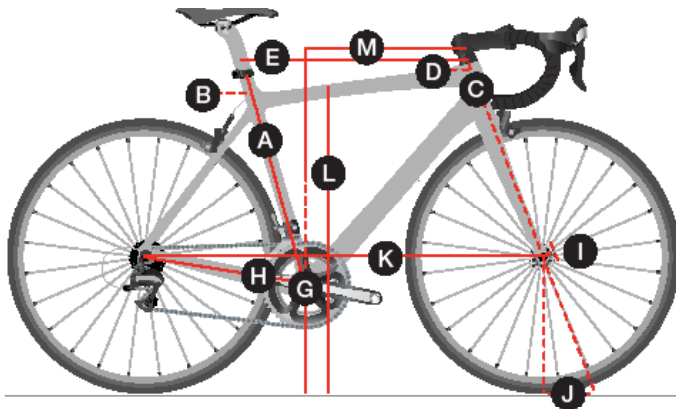

ROAD /

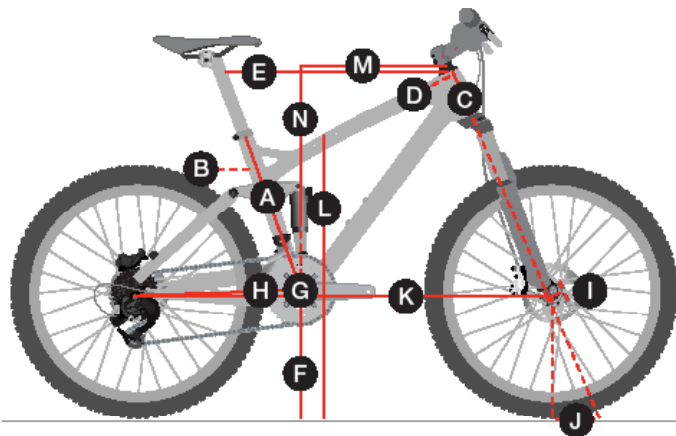

MOUNTAIN /

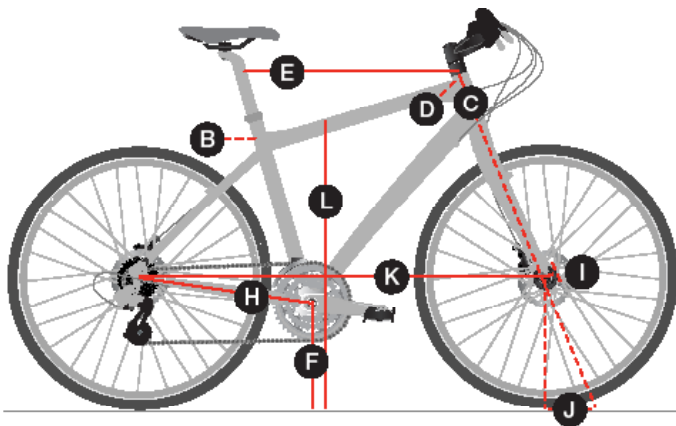


CITY /

A	Seat tube	The distance from the centre of the bottom bracket to the top of the seat tube.
B	Seat tube angle	The angle of seat tube to the ground. Tailored to optimise power transmission on each frame size.
C	Head tube length	The distance between the upper and lower headset. Affects how high your handlebar is relative to your saddle.
D	Head angle	The angle of head tube to the ground. Tailored to optimise steering precision on each frame size.
E	Effective top tube	The horizontal measure from the centre of the headset to the centre of the seatpost. The most important measurement when buying a bike, because it cannot be changed.
F	Bottom bracket height	The vertical distance from the centre of the bottom bracket to the ground. Expresses clearance of the frame over obstacles.
G	Bottom bracket drop	The vertical distance the bottom bracket is below an imaginary horizontal line drawn through the axles. The greater the bottom bracket drop, the lower the rider's centre of gravity.
H	Chainstay length	The distance from the centre of the bottom bracket to the centre of the rear axle.
I	Offset	The perpendicular distance from the steering axis to the centre of the front wheel.
J	Trail	The distance the front wheel's contact patch lags behind the steering axis.
K	Wheelbase	The distance between the axles. Tailored to optimise weight distribution on each frame size.
L	Standover	The vertical distance from the ground to the point on the top tube where you straddle the bike, measured 21cm in front of seat tube.
M	Frame reach	The horizontal distance from the bottom bracket centre to the top of the head tube centreline.
N	Frame stack	The vertical distance from the bottom bracket center to the top of the head tube centreline.

Notes

All sizing and geometry specifications are calculated with a standard wheel size and fork axle to race. Larger volume tyres as well as different fork lengths will change the dimensions in these charts.

MOUNTAIN GEOMETRY /

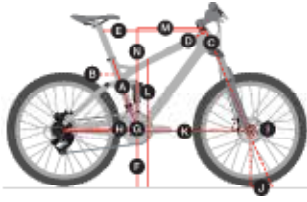

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack
Slash Low geometry**	15.5"	27.5"	39.4	66.5°	10.0	65.0°	55.7	35.0	0.6	43.5	4.4	11.7	114.9	79.5	39.7	58.1
	17.5"	27.5"	41.9	66.5°	10.0	65.0°	58.7	35.0	0.6	43.5	4.4	11.7	117.9	77.7	42.7	58.1
	18.5"	27.5"	44.5	66.5°	10.0	65.0°	60.0	35.0	0.6	43.5	4.4	11.7	119.2	76.2	44.0	58.1
	19.5"	27.5"	47.0	66.5°	11.0	65.0°	61.4	35.0	0.6	43.5	4.4	11.7	120.5	75.6	45.0	59.0
	21.5"	27.5"	52.1	66.5°	12.0	65.0°	64.2	35.0	0.6	43.5	4.4	11.7	123.4	74.5	47.4	59.9
Slash High geometry**	15.5"	27.5"	39.4	67.2°	10.0	65.7°	55.5	35.8	-0.2	43.3	4.4	11.7	114.7	80.2	40.4	57.6
	17.5"	27.5"	41.9	67.1°	10.0	65.6°	58.5	35.8	-0.2	43.3	4.4	11.7	117.7	78.4	43.4	57.6
	18.5"	27.5"	44.5	67.1°	10.0	65.6°	59.8	35.8	-0.2	43.3	4.4	11.7	119.0	76.9	44.7	57.6
	19.5"	27.5"	47.0	67.1°	11.0	65.6°	61.1	35.9	-0.3	43.3	4.4	11.7	120.4	76.4	45.6	58.5
	21.5"	27.5"	52.1	67.1°	12.0	65.6°	64.5	35.9	-0.3	43.3	4.4	11.7	123.2	75.3	48.0	59.4
Session DH Low geometry**	S	27.5"	39.0	57.0°	11.5	63.6°	47.7	35.6	1.0	44.5	5.2	118.0	118.3	80.4	38.2	60.7
	M	27.5"	39.0	57.0°	11.5	63.6°	51.5	35.6	1.0	44.5	5.2	118.0	120.3	79.0	40.2	60.7
	L	27.5"	39.0	57.0°	11.5	63.6°	53.9	35.6	1.0	44.5	5.2	118.0	122.7	78.4	42.6	60.7
	XL	27.5"	39.0	57.0°	11.5	63.6°	58.4	35.6	1.0	44.5	5.2	118.0	125.1	76.7	45.0	60.7
Session DH High geometry**	S	27.5"	39.0	57.6°	11.5	64.2°	57.0	36.4	1.4	44.3	5.2	11.4	118.5	81.0	38.9	60.3
	M	27.5"	39.0	57.6°	11.5	64.2°	59.0	36.4	1.4	44.3	5.2	11.4	120.5	79.3	40.8	60.3
	L	27.5"	39.0	57.6°	11.5	64.2°	61.4	36.4	1.4	44.3	5.2	11.4	122.9	79.0	43.2	60.3
	XL	27.5"	39.0	57.6°	11.5	64.2°	63.8	36.4	1.4	44.3	5.2	11.4	125.3	77.5	45.6	60.3
Session Park Low geometry**	M	26"	4.4	57.0°	12.5	63.6°	58.6	35.6	1.3	42.0	4.5	12.0	116.3	74.7	39.2	59.3
	L	26"	4.4	57.0°	12.5	63.6°	61.0	35.6	1.3	42.0	4.5	12.0	118.8	74.7	41.7	59.3
Session Park High geometry**	M	26"	4.4	57.6°	12.5	64.2°	58.2	36.4	2.1	41.8	4.5	11.9	116.0	75.4	39.8	58.8
	L	26"	4.4	57.6°	12.5	64.2°	60.7	36.4	2.1	41.8	4.5	12.0	118.0	75.4	42.3	58.9
Ticket S Low geometry**	Long	26"	33.1	75.0°	12.3	68.5°	56.5	33.0	0.3	40.0	4.0	8.8	108.5	37.5	42.6	55.3
	High geometry**	Long	26"	33.1	75.8°	12.3	69.3°	56.3	33.9	0.6	39.8	4.0	8.8	108.3	38.3	43.3
Superfly FS Carbon	15.5"	29"	39.4	73.8°	10.5	70.0°	55.6	33.0	3.9	45.2	5.1	8.0	109.9	78.0	39.2	59.3
	17.5"	29"	44.5	73.8°	11.5	70.0°	58.8	33.0	3.9	45.2	5.1	8.0	113.1	77.1	42.1	60.3
	19"	29"	48.3	73.8°	12.5	70.0°	60.6	33.0	3.9	45.2	5.1	8.0	114.9	76.3	43.6	61.2
	21"	29"	53.3	73.8°	13.5	70.0°	62.8	33.0	3.9	45.2	5.1	8.0	117.1	77.7	45.4	62.1
	23"	29"	58.4	73.8°	14.5	70.0°	64.8	33.0	3.9	45.2	5.1	8.0	119.0	79.0	47.0	63.1
Superfly FS AL	15.5"	29"	39.4	70.0°	10.5	70.0°	55.8	33.0	3.9	45.2	5.1	8.0	109.9	78.9	39.2	59.3
	17.5"	29"	41.9	70.0°	11.5	70.0°	58.9	33.0	3.9	45.2	5.1	8.0	113.1	78.4	42.1	60.3
	18.5"	29"	44.5	70.0°	11.5	70.0°	60.1	33.0	3.9	45.2	5.1	8.0	114.3	77.8	43.3	60.3
	19.5"	29"	47.0	70.0°	11.5	70.0°	61.2	33.0	3.9	45.2	5.1	8.0	115.4	77.2	44.4	60.3
	21.5"	29"	52.1	70.0°	13.0	70.0°	63.7	33.0	3.9	45.2	5.1	8.0	117.9	76.4	46.4	61.7
Superfly Carbon SL	23"	29"	55.9	70.0°	14.0	70.0°	64.9	33.0	3.9	45.2	5.1	8.0	119.2	78.5	47.4	62.6
	15.5"	29"	36.8	73.0°	10.3	69.3°	57.0	31.6	5.3	44.5	5.1	8.5	109.0	74.8	38.6	60.2
	17.5"	29"	41.6	72.5°	10.3	69.3°	60.2	31.6	5.3	44.5	5.1	8.5	111.6	76.9	41.2	60.2
	19"	29"	45.7	72.0°	10.3	69.6°	62.2	31.6	5.3	44.5	5.1	8.3	112.7	78.9	42.6	60.3
Superfly Carbon	21"	29"	50.8	72.0°	11.8	69.6°	64.3	31.6	5.3	44.5	5.1	8.3	114.8	82.2	44.2	61.7
	23"	29"	54.5	72.0°	11.8	69.6°	66.3	31.6	5.3	44.5	5.1	8.3	116.9	84.4	46.2	61.7
	15.5"	27.5"	36.8	73.0°	10.0	69.3°	55.8	30.2	4.8	42.5	4.4	8.5	105.3	72.1	37.2	58.3
	17.5"	29"	41.9	72.5°	10.0	69.3°	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.7	41.2	60.0
	18.5"	29"	44.4	72.3°	10.0	69.6°	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.9	42.7	60.1
Superfly AL	19.5"	29"	47.0	72.0°	10.0	69.6°	63.9	31.1	5.8	43.5	5.1	8.3	113.1	79.2	44.3	60.1
	21.5"	29"	52.1	72.0°	12.0	69.6°	65.9	31.1	5.8	43.5	5.1	8.3	115.2	82.9	45.7	61.9
	23"	29"	55.9	72.0°	12.0	69.6°	67.3	31.1	5.8	43.5	5.1	8.3	116.6	84.7	47.1	61.9
	15.5"	27.5"	36.8	73.0°	10.0	69.3°	55.8	30.2	4.8	42.5	4.4	8.5	105.3	72.1	37.2	58.3
	17.5"	29"	41.9	72.5°	10.0	69.3°	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.5	41.2	60.0
Superfly AL	18.5"	29"	44.4	72.3°	10.0	69.6°	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.6	42.7	60.1
	19.5"	29"	47.0	72.0°	10.0	69.6°	63.9	31.1	5.8	43.5	5.1	8.3	113.1	79.5	44.3	60.1
	21.5"	29"	52.1	72.0°	12.0	69.6°	65.9	31.1	5.8	43.5	5.1	8.3	115.2	82.3	45.7	61.9
	23"	29"	55.9	72.0°	12.0	69.6°	67.3	31.1	5.8	43.5	5.1	8.3	116.6	84.4	47.1	61.9

All dimensions are in centimetres unless otherwise stated.

Not all sizes are available for all models.

Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.

**Refers to high or low setting on adjustable-geometry bikes.

MOUNTAIN GEOMETRY /

Models	Frame size*	Wheel size	A - Seat tube	B - Seat tube angle	C - Head tube length	D - Head angle	E - Effective top tube	F - Bottom bracket height	G - Bottom bracket drop	H - Chainstay length	I - Offset	J - Trail	K - Wheelbase	L - Standover	M - Frame reach	N - Frame stack
Cali Carbon	13.5"	27.5"	34.3	73.0°	10.0	69.0°	54.1	30.2	4.8	42.5	4.4	8.7	103.7	71.0	37.0	56.3
	15.5"	27.5"	36.8	73.0°	10.0	69.3°	55.8	30.2	4.8	42.5	4.4	8.5	105.3	72.1	37.2	58.3
	17.5"	29"	41.9	72.5°	10.0	69.3°	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.7	41.2	60.0
	18.5"	29"	44.4	72.3°	10.0	69.6°	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.9	42.7	60.1
Cali	13.5"	27.5"	34.3	73.0°	10.0	69.0°	54.1	30.2	4.8	42.5	4.4	8.7	103.7	71.0	37.0	56.3
	15.5"	27.5"	36.8	73.0°	10.0	69.3°	55.8	30.2	4.8	42.5	4.4	8.5	105.3	72.1	37.2	58.3
	17"	29"	41.9	72.5°	10.0	69.3°	60.2	31.1	5.8	43.5	5.1	8.5	110.3	76.5	41.2	60.0
	18.5"	29"	44.4	72.3°	10.0	69.6°	62.0	31.1	5.8	43.5	5.1	8.3	111.6	77.6	42.7	60.1
X-Caliber	13.5"	27.5"	34.3	73.0°	10.0	69.0°	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5
	15.5"	27.5"	39.4	73.0°	10.0	69.3°	56.0	30.6	4.8	43.8	4.4	8.7	106.6	74.5	38.1	58.5
	17.5"	29"	41.9	72.5°	10.0	69.3°	60.2	31.6	5.3	44.5	5.1	8.5	111.6	76.5	41.3	60.0
	18.5"	29"	44.4	72.3°	10.0	69.6°	62.0	31.6	5.3	44.5	5.1	8.3	112.8	77.7	42.8	60.1
	19.5"	29"	47.0	72.0°	10.0	69.6°	63.9	31.6	5.3	44.5	5.1	8.3	114.4	78.9	44.4	60.1
	21.5"	29"	52.1	72.0°	12.0	69.6°	65.9	31.6	5.3	44.5	5.1	8.3	116.5	82.5	45.8	62.0
	23"	29"	55.9	72.0°	12.0	69.6°	67.3	31.6	5.3	44.5	5.1	8.3	117.9	84.8	47.2	62.0
Marlin	13.5"	27.5"	34.3	73.0°	10.0	69.0°	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5
	15.5"	27.5"	39.4	73.0°	10.0	69.3°	56.0	30.6	4.8	43.8	4.4	8.7	106.6	74.5	38.1	58.5
	17.5"	29"	41.9	72.5°	10.0	69.3°	60.2	31.6	5.3	44.5	5.1	8.5	111.6	76.5	41.3	60.0
	18.5"	29"	44.4	72.3°	10.0	69.6°	62.0	31.6	5.3	44.5	5.1	8.3	112.8	77.7	42.8	60.1
	19.5"	29"	47.0	72.0°	10.0	69.6°	63.9	31.6	5.3	44.5	5.1	8.3	114.4	78.9	44.4	60.1
	21.5"	29"	52.1	72.0°	12.0	69.6°	65.9	31.6	5.3	44.5	5.1	8.3	116.5	82.5	45.8	62.0
Skye	13.5"	27.5"	34.3	73.0°	10.0	69.0°	52.5	30.6	4.8	43.8	4.4	8.9	103.3	66.0	35.2	56.5
	15.5"	27.5"	39.4	73.0°	10.0	69.3°	56.0	30.6	4.8	43.8	4.4	8.7	106.6	68.0	38.1	58.5
	17"	29"	40.6	73.0°	10.0	69.0°	59.0	31.2	4.4	44.5	5.1	8.5	111.3	66.9	40.7	59.8
	18.5"	29"	44.5	73.0°	10.0	69.0°	61.2	31.2	4.4	44.5	5.1	8.5	113.5	68.5	42.9	59.8
Skye 26	13"	26"	33.0	74.0°	11.0	70.5°	52.4	28.7		43.0	4.0	7.6	101.9	65.5		
	16"	26"	40.6	73.5°	11.0	70.5°	54.6	29.1		43.0	4.0	7.6	103.6	63.1		
	19.5"	26"	49.5	73.0°	17.0	70.5°	57.5	29.3		43.0	4.0	7.6	106.4	62.5		
3 Series	13"	26"	33.0	74.0°	11.0	70.5°	52.4	28.7		43.0	4.0	7.6	101.9	70.5		
	16"	26"	40.6	73.5°	11.0	70.5°	55.0	29.1		43.0	4.0	7.6	104.0	73.8		
	18"	26"	45.7	73.5°	13.0	70.5°	56.5	29.3		43.0	4.0	7.6	105.7	77.2		
	19.5"	26"	49.5	73.0°	15.0	70.5°	58.0	29.3		43.0	4.0	7.6	106.8	79.9		
	21"	26"	53.3	73.0°	17.0	70.5°	59.0	29.3		43.0	4.0	7.6	107.9	82.7		
	22.5"	26"	57.2	72.5°	19.0	70.5°	60.0	29.5		43.0	4.0	7.6	108.4	85.7		
Powerfly+	15.5"	29"	40.0	73.0°	14.0	69.0°	56.1	33.2	5.3	48.5	5.1		112.0	78.8	36.5	63.8
	17.5"	29"	42.5	72.5°	14.0	69.0°	58.3	33.2	5.3	48.5	5.1		113.7	79.0	38.2	63.8
	19"	29"	47.0	72.5°	16.0	69.0°	60.7	33.2	5.3	48.5	5.1		116.2	81.1	40.0	65.6
	21"	29"	51.5	72.5°	16.0	69.0°	63.2	33.2	5.3	48.5	5.1		118.7	84.3	42.5	65.6
Powerfly+ WSD	15.5"	29"	40.0	73.0°	14.0	69.0°	55.5	32.0	4.8	46.5	4.4		109.5	72.5	36.5	62.1
	17.5"	29"	42.5	72.5°	14.0	69.0°	57.8	32.0	4.8	46.5	4.4		111.2	72.0	38.2	62.1
Fuel EX+	15.5"	29"	36.8	71.0°	13.0	68.0°	55.5	33.3	1.7	47.0	4.4	9.4	110.1	75.5	38.9	59.5
	17.5"	29"	41.9	71.0°	13.2	68.0°	58.0	33.3	1.7	47.0	4.4	9.4	112.6	73.6	42.2	59.5
	18.5"	29"	44.5	71.0°	14.0	68.0°	60.5	33.3	1.7	47.0	4.4	9.4	115.1	72.9	39.8	60.2
	19.5"	29"	47.0	71.0°	14.0	68.0°	62.7	33.3	1.7	47.0	4.4	9.4	117.3	72.1	42.0	60.2
	21.5"	29"	52.1	71.0°	16.0	68.0°	65.3	33.3	1.7	47.0	4.4	9.4	120.0	73.9	43.9	62.1

All dimensions are in centimetres unless otherwise stated.

Not all sizes are available for all models.

Not all sizes are available in all markets.

*Frame size represents fit. For seat tube length, see column A - Seat tube.



CITY GEOMETRY /

Models	Frame size*	Wheel size	A- Seat tube	B- Seat tube angle	C- Head tube length	D- Head angle	E- Effective top tube	F- Bottom bracket height	H- Chainstay length	I- Offset	J- Trail	K- Wheelbase	L- Standover	
7.7 FX	50cm	700c	45.0	74.6 °	13.0	71.1 °	51.9	42.0	5.3	6.0	99.6	71.6		
	52cm	700c	47.5	74.2 °	14.5	71.3 °	53.0	42.0	5.3	5.9	100.3	73.5		
	54cm	700c	50.0	73.7 °	16.0	71.3 °	54.2	42.0	5.3	5.9	101.0	75.4		
	56cm	700c	52.5	73.3 °	17.5	71.9 °	55.4	42.0	4.8	6.1	100.8	77.6		
	58cm	700c	54.8	73.0 °	19.5	72.0 °	56.7	42.5	4.8	6.0	102.2	79.6		
	60cm	700c	56.7	72.8 °	22.0	72.1 °	57.9	42.5	4.8	5.9	103.2	81.7		
7.5 FX 7.4 FX & Disc 7.3 FX 7.2 FX & Disc	15"	700c	38.1	74.5 °	11.5	70.5 °	54.4	28.5	44.5	5.0	7.0	105.7	69.3	
	17.5"	700c	44.4	74.0 °	13.0	70.5 °	54.8	28.5	44.5	5.0	7.0	105.7	73.5	
	20"	700c	50.8	73.5 °	16.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.8	78.3	
	22.5"	700c	57.1	73.0 °	19.0	72.5 °	59.0	28.5	44.5	4.5	6.2	106.4	83.1	
7.4 FX WSD 7.3 FX WSD 7.2 FX WSD	25"	700c	63.5	72.0 °	22.0	72.5 °	60.3	28.5	44.5	4.5	6.2	106.5	87.7	
	13"	700c	33.0	75.0 °	11.5	70.0 °	53.0	28.5	44.5	5.0	7.3	105.3	66.6	
	15"	700c	38.1	75.0 °	13.0	70.5 °	53.3	28.5	44.5	5.0	7.0	105.3	69.7	
	17"	700c	43.2	74.5 °	15.0	70.5 °	53.9	28.5	44.5	5.0	7.0	105.5	73.2	
	19"	700c	48.3	74.0 °	16.0	70.5 °	55.3	28.5	44.5	5.0	7.0	106.4	76.7	
	15" Stagger	700c	38.1	74.5 °	13.0	70.5 °	54.3	28.5	44.5	5.0	7.0	105.6	62.4	
	17.5" Stagger	700c	44.5	74.0 °	15.0	70.5 °	54.8	28.5	44.5	5.0	7.0	105.7	63.0	
	20" Stagger	700c	50.8	73.5 °	17.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.7	63.3	
	7.1 FX 7.0 FX	15"	700c	38.1	74.5 °	11.5	70.5 °	54.4	28.5	44.5	5.0	7.1	105.6	69.7
		17.5"	700c	44.4	74.0 °	13.0	70.5 °	54.8	28.5	44.5	5.0	7.1	105.6	73.8
20"		700c	50.8	73.5 °	16.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.7	78.6	
22.5"		700c	57.1	73.0 °	19.0	72.5 °	59.0	28.5	44.5	4.5	6.3	106.3	83.4	
25"		700c	63.5	72.0 °	22.0	72.5 °	60.3	28.5	44.5	4.5	6.3	106.4	88.0	
15" Stagger		700c	38.1	74.5 °	13.0	70.5 °	54.3	28.5	44.5	5.0	7.1	105.6	62.7	
17.5" Stagger		700c	44.5	74.0 °	15.0	70.5 °	54.8	28.5	44.5	5.0	7.1	105.7	63.2	
20" Stagger		700c	50.8	73.5 °	17.0	71.5 °	56.8	28.5	44.5	4.5	7.0	105.7	63.6	
DS Series	22.5" Stagger	700c	57.2	73.0 °	19.0	72.5 °	58.5	28.5	44.5	4.5	6.3	106.3	64.0	
	15.5"	700c	36.6	74.5 °	11.4	70.0 °	57.5	29.4	45.5	3.8	8.5	109.1	73.8	
	17.5"	700c	41.7	74.0 °	12.4	71.0 °	59.0	29.4	45.5	3.8	8.2	109.5	76.1	
	19"	700c	46.7	73.5 °	13.4	71.0 °	60.5	29.4	45.5	3.8	8.2	110.5	79.1	
	21"	700c	50.5	73.0 °	14.4	71.5 °	62.0	29.4	45.5	3.8	7.8	111.0	81.5	
Neko	22.5"	700c	54.3	72.5 °	15.4	72.0 °	63.5	29.4	45.5	3.8	7.5	111.2	84.1	
	14"	700c	33.8	74.5 °	11.4	70.0 °	55.0	29.4	45.5	3.8	8.9	107.0	69.4	
	16"	700c	38.2	74.0 °	11.4	70.5 °	56.0	29.4	45.5	3.8	8.5	107.0	71.6	
	18"	700c	43.3	73.5 °	12.4	71.0 °	57.5	29.4	45.5	3.8	8.2	107.5	74.5	
	14" Stagger	700c	35.6	74.5 °	13.4	70.0 °	55.0	29.4	45.5	3.8	8.9	107.0	62.2	
	16" Stagger	700c	38.2	74.0 °	13.4	70.5 °	56.0	29.4	45.5	3.8	8.5	107.0	62.2	
	18" Stagger	700c	43.3	73.5 °	14.4	71.0 °	57.5	29.4	45.5	3.8	8.2	107.6	62.2	
CrossRip	49cm	700c	50.0	74.5 °	10.5	70.6 °	52.5	27.7	43.5	4.5	7.6	101.5	73.1	
	52cm	700c	52.0	74.0 °	12.8	71.2 °	54.8	27.7	43.5	4.5	7.2	102.9	75.3	
	54cm	700c	54.0	73.5 °	15.0	71.5 °	56.9	27.7	43.5	4.5	7.0	104.2	76.7	
	56cm	700c	56.0	73.0 °	16.7	72.0 °	58.4	28.1	43.5	4.5	6.7	105.0	78.7	
	58cm	700c	58.0	73.0 °	18.0	72.5 °	59.3	28.1	43.5	4.5	6.4	105.3	80.1	
	61cm	700c	61.0	72.5 °	20.0	72.5 °	60.9	28.1	43.5	4.5	6.4	106.3	82.6	
520 Disc	48cm	700c	44.0	74.3 °	11.5	69.5 °	52.0	27.4	45.0	5.2	7.4	104.1	71.3	
	51cm	700c	48.2	74.0 °	12.5	70.0 °	53.1	27.4	45.0	5.2	7.1	104.5	74.1	
	54cm	700c	51.2	73.8 °	14.0	71.0 °	54.3	27.8	45.0	5.2	6.5	104.8	76.8	
	57cm	700c	54.3	73.5 °	16.0	71.8 °	55.7	27.8	45.0	5.2	5.9	105.2	79.4	
	60cm	700c	57.5	73.0 °	20.0	71.8 °	58.3	27.8	45.0	5.2	5.9	107.4	82.6	
	63cm	700c	60.5	72.8 °	23.0	72.3 °	60.3	27.8	45.0	5.2	5.6	108.6	85.4	



All dimensions are in centimetres unless otherwise stated.
 Not all sizes are available for all models.
 Not all sizes are available in all markets.
 *Frame size represents fit. For seat tube length, see column A - Seat tube.